




# 567

# PRO-TAC REINFORCED SELF ADHERING MEMBRANE

## TECHNICAL DATA SHEET

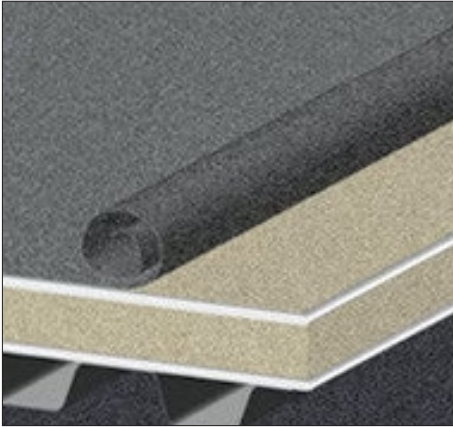

MIAMI-DADE COUNTY  
APPROVED

### TYPICAL PHYSICAL & PERFORMANCE CHARACTERISTICS:

Application Method	Self Adhered Membrane
Thickness (ASTM D1777)	75 mils
Elongation (ASTM D1682)	85% MD
Water Vapor Permeance (ASTM E96)	0.1 perm max.
Application Temperature	50 °F & Rising
Puncture Resistance (ASTM E154)	200 lbs.
Size 3 rolls @ 12" x 50'	1.5 sq.
Size 36" x 50'	1.5 sq.

### Approx. Shipping Weights:

(Note: All approx. weights include container)

3 - 12"x50' Rolls                      ?? lb.

### DESCRIPTION:

**APOC® 567 PRO-TAC Reinforced Self Adhering Membrane** is an easy to apply SBS Rubberized Membrane used for a variety of roofing and waterproofing applications. APOC® 567 comes in 12" and 36" rolls that are 50 ft. in length. It's 12" width is primarily used for flashing perimeter metal edge, curbs, drains and metal flanges. Full width sheets can be used to flash under HVAC units and over metal and wood covers on curbs. Can also be used as a base ply or patch and repair systems over insulation board. It's high tensile and elongation make it an excellent split repair reinforcement for existing BUR, SBS and APP modified bitumen systems. It requires no open flame torch or adhesive to apply. Remove release paper before applying. APOC® reflective coating must be applied to protect surface from the sun and UV exposure.

### APPLICATION:

For exterior use only. It is recommended to prime asphalt and metal surfaces with APOC® 103 Asphalt Primer prior to application. For wood or gypsum type decks use APOC® 296 Primer. Application should take place in temperatures a minimum of 50 °F and rising to a clean, dry and sound substrate. For specific instructions see APOC specifications and details.

### STORAGE & HANDLING PRECAUTIONS:

Product safety information required for safe use is not included. Before handling, read product safety data sheets and container labels for safe use and for physical and health hazard information. Safety Data Sheets are available on the APOC website at [www.apoc.com](http://www.apoc.com). You can also obtain a copy from your local APOC Distributor or APOC sales representative.

### WARRANTY & DISCLAIMER:

Register your warranty for extended warranty terms within 60 days of the completion of the project at [www.apoc.com/pages/warranty](http://www.apoc.com/pages/warranty). APOC Roofing Systems, LLC hereby warrants to the original purchaser, contingent upon original proof of purchase, that this product will be free from any defects that may materially and adversely affect the product's performance for a period of one year from the date of original purchase.

