



APOC is a premier manufacturer of roofing and maintenance products that maximize productivity, energy efficiency and building performance. From new construction of residential homes to repair and restoration of commercial buildings, APOC delivers quality, performance and ingenuity demanded by today's building professional.

Talk to an APOC representative today and let us know how we can help you on your next project!

APOC, The Choice of Top Professionals®.

www.apoc.com

Western Region (562) 423-6471

Eastern Region (813) 248-2101

BR-1031 C20



WEATHER-ARMOR®

The Ultimate Ice, Rain, Wind & Fire Protection for your Home or Building

FT³ FLEECE-TOP®
ROOF UNDERLAYMENT
 Polyester Use Under Tile, Metal & with Mechanical Attachment



FT³ FLEECE-TOP®
ROOF UNDERLAYMENT
 Polyester Use Under Tile, Metal & with Mechanical Attachment

208 SQ FT
 39.56" x 65.8"
 80 MILS

- The Best® Patented Adhesive & Waterproofing System
- K11 Reinforced Seam Technology for Added Strength
- Self-Stop Tearing-Top® System for Added Traction

WEATHER-ARMOR®
 The Ultimate Ice, Rain, Wind & Fire Protection for your Home or Building



FT³ FLEECE-TOP[®] ROOF UNDERLAYMENT
 Polyester Use Under Tile, Metal & with Mechanical Attachment


Weather-Armor[®] FT³ Fleece-Top[®] Roof Underlayment is a state of the art, premium roof underlayment and leak barrier that is ideally suited for tile and metal roofing systems, as well as where conditions require a mechanically fastened roof system. FT³ utilizes Tri-Bond[®]'s patented 3 component adhesive system and RST, making FT³ the strongest and most durable underlayment in its class. Manufactured with dual reinforcements, heavy weight polyester and high tensile glass reinforcement, FT³ provides exceptional strength, durability and waterproofing capabilities.

- **100% Waterproof & Nail Sealable Membrane**
- **RST Patented Reinforced Seam Technology**
- **Stops Wind Driven Rain, Ice Dams, Leaks & Water Damage**
- **Protects Against Aesthetic & Structural Damage**
- **Safe-Step Polyester Fleece-Top Surface**
- **UV Protected & Temperature Resistant up to 180 Days**



FT³ FLEECE-TOP TECHNICAL DATA:

Size	39 3/8" x 65' 8"
Area	Approx. 2 Squares
Thickness (ASTM D1970)	60 mils
Max Load (ASTM D5147) (lbf/in)	>25
Elongation at Break	>10 %
Min. of Modified Bitumen Portion (ASTM D5147)	
Tear Resistance (ASTM D1970) (lbf/in)	>60
Moisture Vapor Permeability (ASTM E96)	<0.1
Adhesion to Plywood @ 40°F (ASTM D1970)	>25 lbf/in
Adhesion to Plywood @ 75°F (ASTM D1970)	>50 lbf/in
Sealability Around Nail (ASTM D1970)	Pass
Waterproof Integrity After Low Temp. Flexibility	Pass
Slip Resistance (ASTM D1970)	Pass
Low Temperature Flexibility (D1970)	Pass

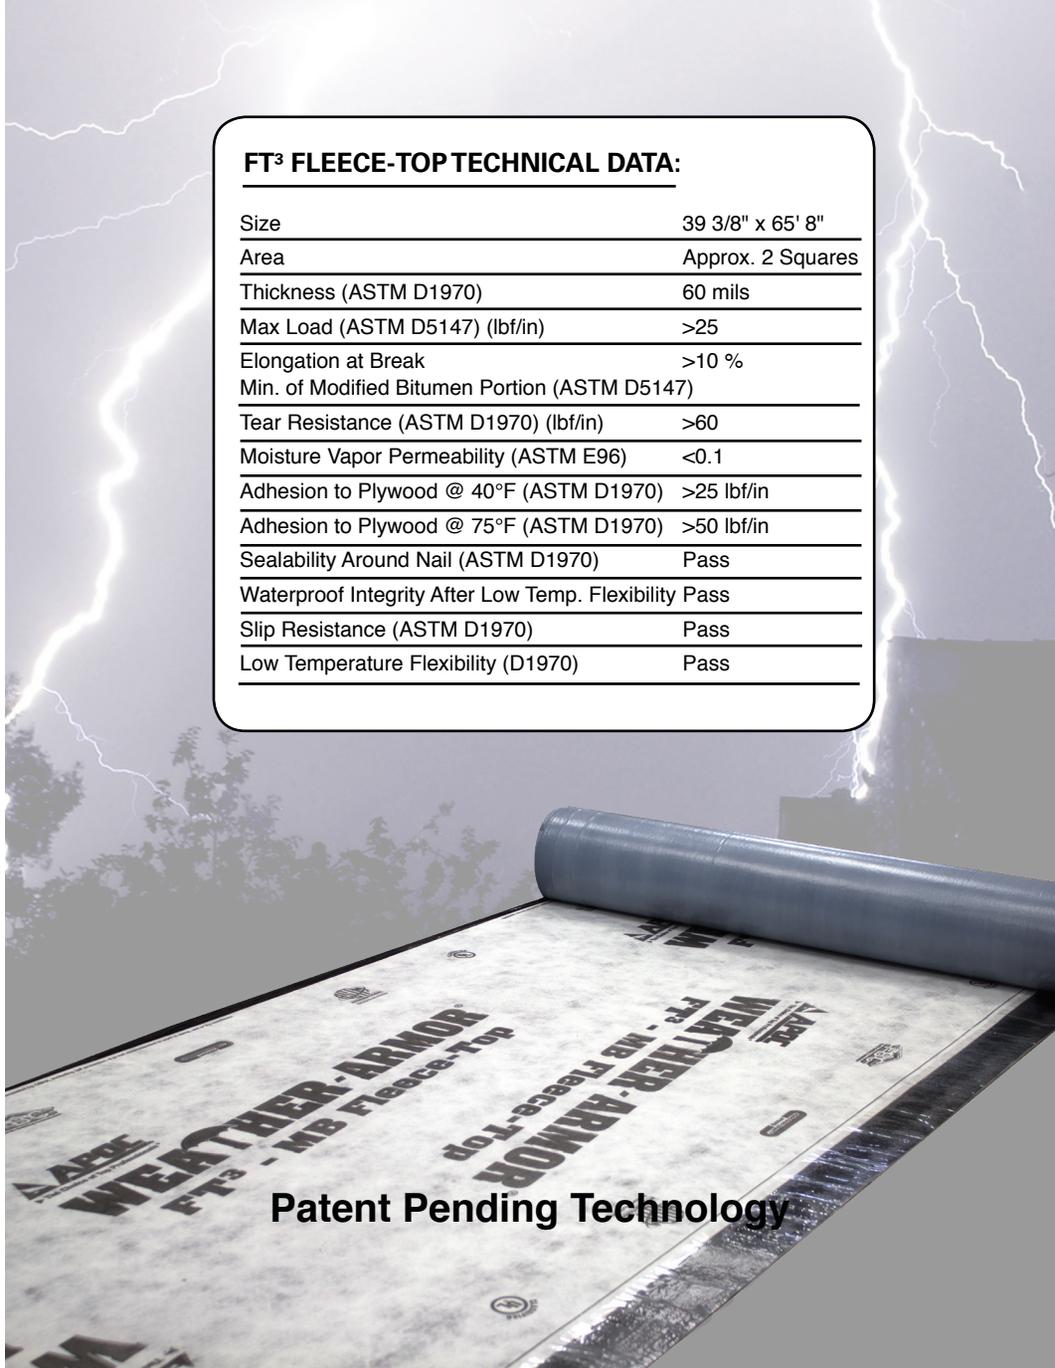

Patent Pending Technology

