




INCREDIBLE TAPE

FLEECE-TOP HEAVY DUTY ALL PURPOSE TAPE



TECHNICAL DATA SHEET

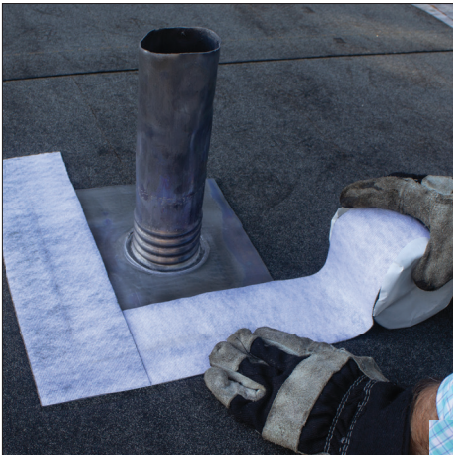

TYPICAL PHYSICAL & PERFORMANCE CHARACTERISTICS:

Peel Strength	9.5 kg +/- cm width
Application Temperature	- 34°C to 93°C
Colour	Grey
Elongation	900%
Low Temperature Flexibility	Passes at - 54°C- <i>no cracking</i>
Permeability	.001 perms max
Shelf Life	5 years*
Tensile Break	4000+ / -500 psi
Total Thickness	889 µ
UV Resistance	Excellent

*Storage at ambient room temperatures

Approx. Shipping Weights:

(Note: All approx. weights include container)

10 cm X 15.2 m Rolls (4 per case) 7.06kg

DESCRIPTION:

APOC® Fleece-Top Heavy Duty All Purpose Incredible® Tape is a versatile, heavy-duty, easy-to-use leak repair, reinforcement and construction tape for residential, commercial, and industrial applications that forms a tough and durable repair with a lifetime of dependability. APOC Incredible Tape will immediately seal materials, stopping infiltration of leaks from air, moisture and water. APOC Incredible Tape adheres to almost any-thing including metal, wood, fiberglass, plastic, structural concrete, concrete block, brick, smooth BUR, smooth SBS, smooth APP, EPDM, TPO, Hypalon and PVC surfaces. Ideal for use on roofs, gutters, skylights, windows, doors, flashings, walls, foundations and many other surfaces.

Fleece-Top surfacing is the ideal tape for use in coating applications. The polyester fleece used in this product is a high strength, spunbound reinforcement. APOC Incredible Tape must be sealed with an approved APOC patch, coating or sealant.

PREPARATION:

- General: Substrate should be clean, dry and free of dew, frost, oil, salt, dust and rust.
- TPO/EPDM: Clean with rags and acetone to remove any oil or grime.
- Silicone: Do not apply over silicone coatings or sealants.
- PVC/Plastic: Remove chalking with light sanding or scouring prior to application. Course sand paper or steel wool can be used.
- BUR & MOD-BIT: Use wire brush to remove loose granules on cap sheets.
- Gravel: Spud all embedded gravel on Gravel BUR before applying.
- Metal: Use APOC Incredible Tape on the seams and joints of metal surfaces. Remove all rust with wire brush. After application, seal polyester with APOC coating or mastic extending coating or mastic at least 2.5 cm onto substrate surface. Use masking tape for clean lines.

COLD / HOT WEATHER TIPS:

- In cold weather, allow Incredible Tape to remain inside at ambient room temperature (18-24°C) before application. When applying in temperatures between -34°C and 4°C, apply primer and let cure 30 minutes prior to installation of tape. Warming the substrate with a hot air gun is also helpful.
- In hot weather, keep rolls out of direct sunlight and in shade. Pre-peel edges approx. 1.25 cm to speed up installation.

APPLICATION:

1. Cut Incredible Tape to length. Shorter lengths (less than 1.2 m) are easier to work with unless using a team of two or more applicators.
2. Hold edge of tape with thumb and index finger of both hands about 3-5 cm apart. Repeatedly wiggle tape ends back and forth scrunching the end of tape. Watch for edge of release liner to loosen away from tape and peel back release liner.
3. Press tape in place using a gloved hand or a steel roller. Always roll from the center out to remove trapped air pockets and fish mouths.
4. Apply the exact length to predetermined location as tape cannot be peeled up and reset.
5. Puncture air pockets in tape and cut out tape wrinkles before continuing. Reseal puncture and cuts. When working in corners, start in corners to eliminate "tenting".
6. When installing fleece-top tape, it must be coated with an APOC acrylic coating or patch after installation. This tape must be completely saturated and sealed. After coating, product can be spray painted to colour match.

STORAGE AND HANDLING:

For best results, test adhesion on membranes before applying. Do NOT store at temperatures above 43°C. Do NOT stretch tape during installation.

COVERAGE RATE: Approximately 15.2 m/roll

Gardner-Gibson, Inc.

4161 East 7th Avenue. Tampa, FL 33605, United States
+1 (813) 248-2101 | www.icpgroup.com | H25





INCREDIBLE TAPE

FLEECE-TOP HEAVY DUTY ALL PURPOSE TAPE

EN



TECHNICAL DATA SHEET

WARRANTY AND DISCLAIMER:

APOC warrants product to be free of material defects for a period of 20 years, the "Warranty Period", from the date of purchase. Product must be applied in accordance with the proper application procedures, and for the intended use as stated on the label. Proper preparation and drying conditions must be observed to achieve correct results. Should a product not perform as stated, APOC shall, within its sole discretion and upon receipt of purchaser's timely written notice within the Warranty Period, provide replacement product to repair the affected area or prorate a portion of the purchase price of the defective product based on the claim period. This limited warranty does not cover labor or installation costs, consequential damages or incidental damages. Under no circumstances will the company be liable for any amount in excess of the product purchase price. Contact company below to request a refund with purchase receipt. There are no warranties which extend beyond the description on the face hereof. THIS LIMITED WARRANTY IS THE SOLE WARRANTY PROVIDED BY APOC TO THE PURCHASER. THERE IS NO IMPLIED WARRANTY OF MERCHANTABILITY OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE PROVIDED WITH THIS PRODUCT.