# TUFF-GRIP™ 30 **PREMIUM SYNTHETIC ROOF UNDERLAYMENT**





professional protection™



#### **PREMIUM WEATHER PROTECTION**

PROTECTS AGAINST DESTRUCTIVE ELEMENTS



# **TUFF-GRIP COATING TECHNOLOGY**

**ENHANCED GRIP TO DECK** BEFORE FASTENING FOR SAFER, FASTER INSTALL



#### **HIGH-TRACTION SURFACE**

**OUTSTANDING WALKABILITY ON** STEEP, WET OR SLICK ROOF **SURFACES** 



**ENHANCED 90 DAY UV RESISTANCE** 

WITHSTANDS DIRECT SUNLIGHT EXPOSURE WITHOUT DEGRADATION



APOC TUFF-GRIP™ 30 is a premium synthetic roofing underlayment engineered for maximum strength, durability, and installation efficiency.

Designed with high traction and slip resistance that enhances safety and productivity even on steep slopes. Its UV-resistant composition provides reliable protection during extended exposure, while its lightweight yet robust construction ensures superior defense against moisture, wind, and harsh weather.

Ideal for professional roofing applications, TUFF-GRIP™ combines rugged performance with ease of handling for a dependable, long-lasting underlayment solution.

# **FEATURES:**

- TUFF-GRIPTM Coating Technology: Securely grips the roof deck before fastener application, ensuring easier and safer installation.
- High-Traction Surface: Delivers outstanding walkability, even on steep, wet or slick surfaces. Premium Weather Protection: Shields against wind-driven rain and moisture infiltration.
- **All-Temperature.** All-Weather Performance: Remains flexible in extreme conditions —from -40°F to 240°F.
- Extended UV Resistance: Withstands up to 90 days of direct sunlight exposure without degradation.
- **Durable Performance:** Tough synthetic construction resists tears, punctures, and stretching.
- Lightweight Design: Easier to handle and install, improving job site efficiency.
- Long-Term Assurance and Reliability: Backed by a robust 30-year limited warranty.
- Wider Coverage: 48" width for faster, more efficient installs.

# TOUGH GRIP. TOUGHER PROTECTION.





# **USES:**

APOC TUFF-GRIP™ 30 is a cost effective roofing underlayment used beneath fiberglass and asphalt shingles, shakes, stone-coated steel roofing shingles, synthetic slate or sloped installations of standing seam metal panels.

#### **PRODUCT SPECS:**

PRODUCT CODE	AP-6400-30
DIMENSIONS	48" X 250′
MATERIAL PER ROLL	1,000 Sq.ft.
(EXCLUDES LAPS)	10 Squares
APPROXIMATE ROLL WEIGHT	22.6 lb

SEE TDS ON APOC.COM FOR ADDITIONAL PRODUCT DATA

# **COMPLIANCE & CODES:**


- Intertek Code Compliance Research Report CCRR-0604
- Certified to ASTM D8257
- Performance characteristics meet or exceed ASTM D4869 – Type I, II, III and IV
- Performance characteristics meet or exceed ASTM D226 – Type I, II
- Meets the requirements of ICC-AC-188
- FBC Approved #FL47536
- UL Classified ASTM E108 (Class A)

# **ABOUT APOC**

APOC is a premier brand for roofing, waterproofing and maintenance products that maximize productivity, performance and energy efficiency. ICP is a global producer with local manufacturing, support and customer service and is proud to be headquartered in the USA. When you offer APOC coatings, adhesives, sealants and construction products, you get more than just quality products. We're your one-stop shop for the widest range of product solutions, training and support to deliver value to your customers on time, on budget and beyond expectations.

CONTACT US: www.apoc.com | 888-891-3536



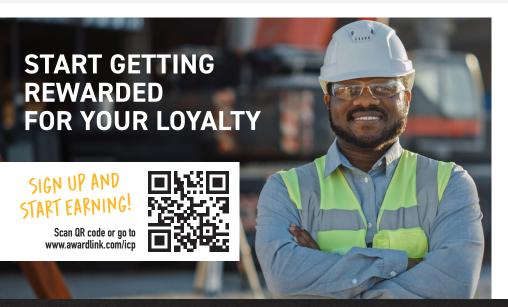



# QUALIFY FOR VARIOUS REWARDS

- Points for purchase
- Company recognition
- Free swaq
- Marketing support
- And more!



